

# Rotary Wafer Switches




## MA & MK Standard Contact Arrangements

### ENGINEERING BULLETIN NO. 25a/29a

The diagrams on this Bulletin show the standard contact arrangements possible for the Models MA & MK with 30° and 45° indexing.



When specifying, please refer to these layouts, all of which (both front and rear) are viewed from the knob end with the switch in the fully anti-clockwise position; the rear being viewed through the front.

### 30° Indexing

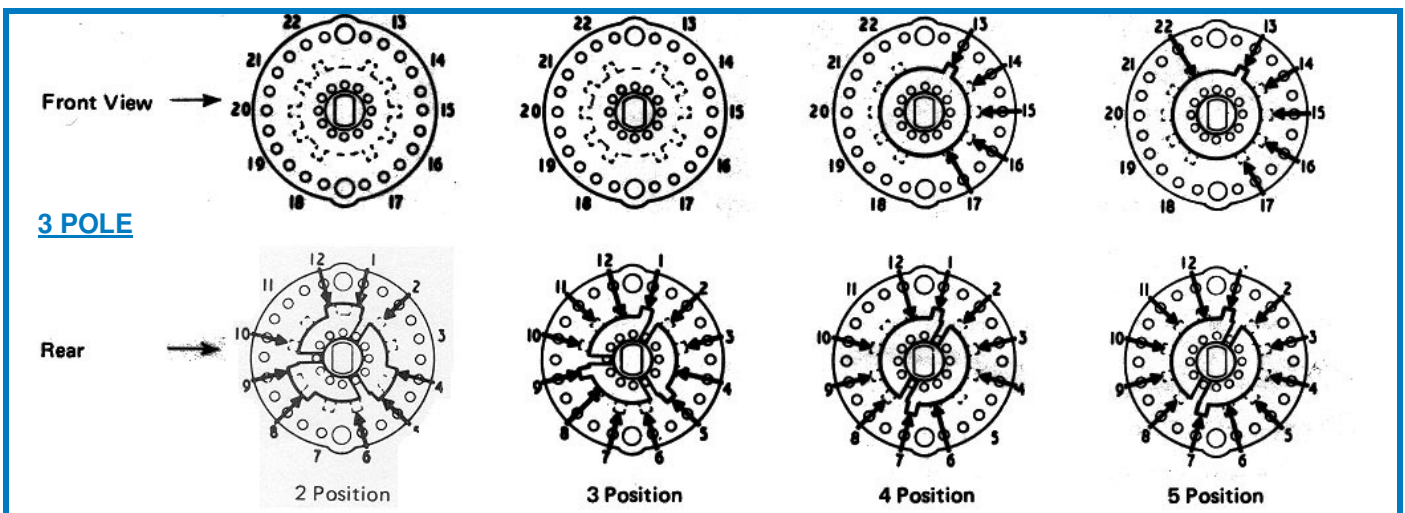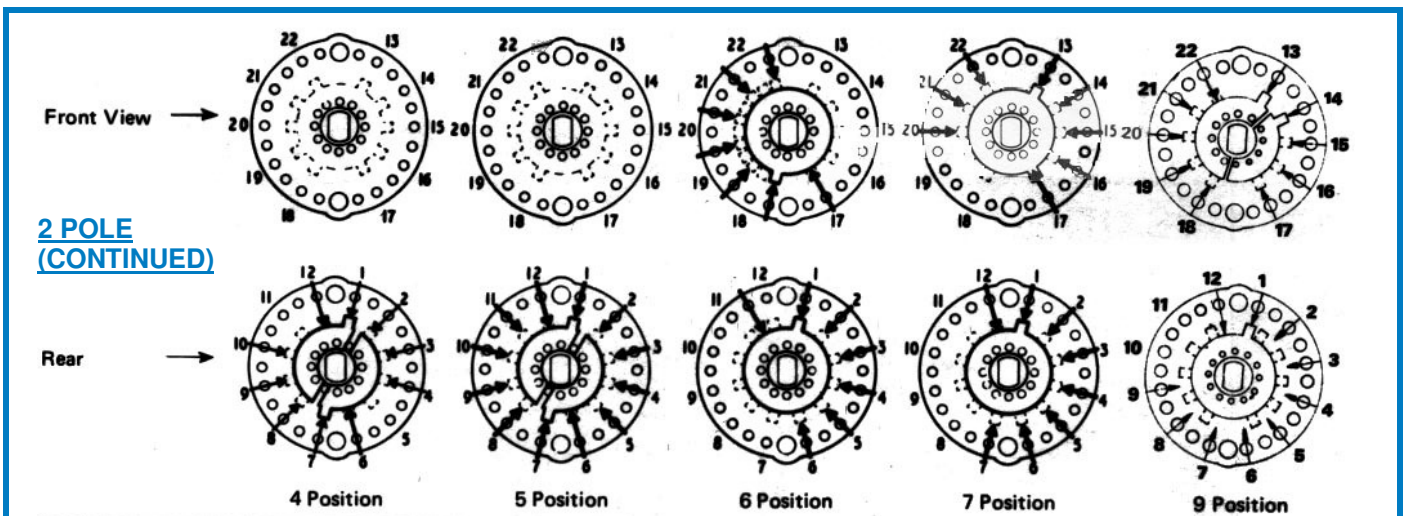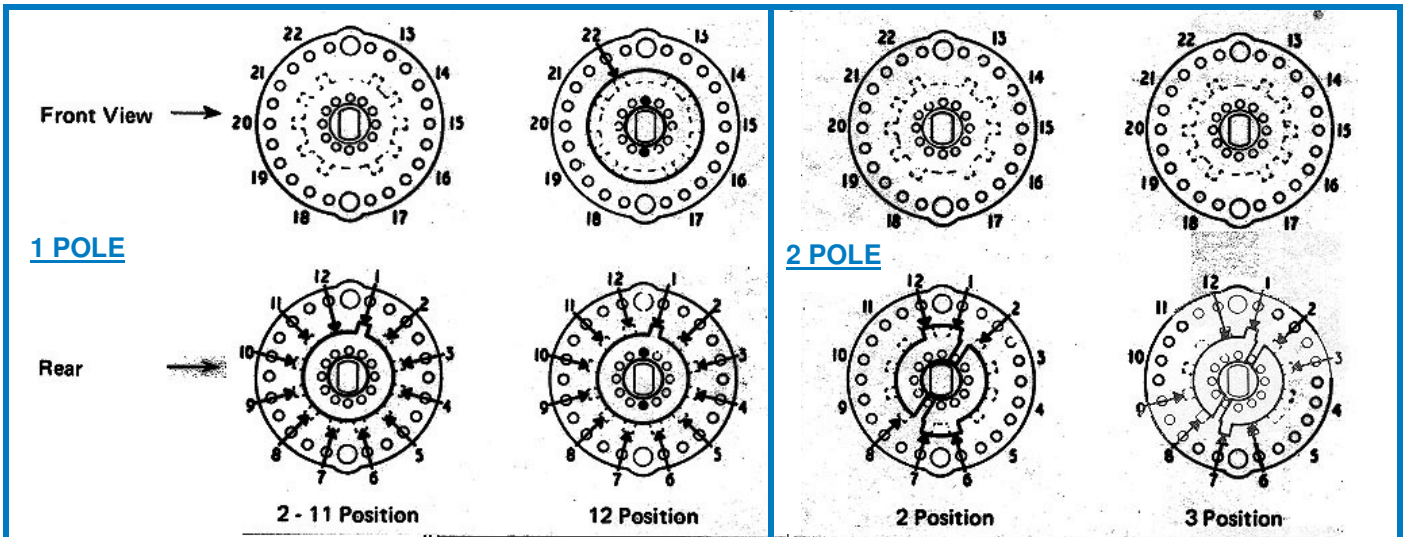


# Rotary Wafer Switches

## MA & MK Standard Contact Arrangements

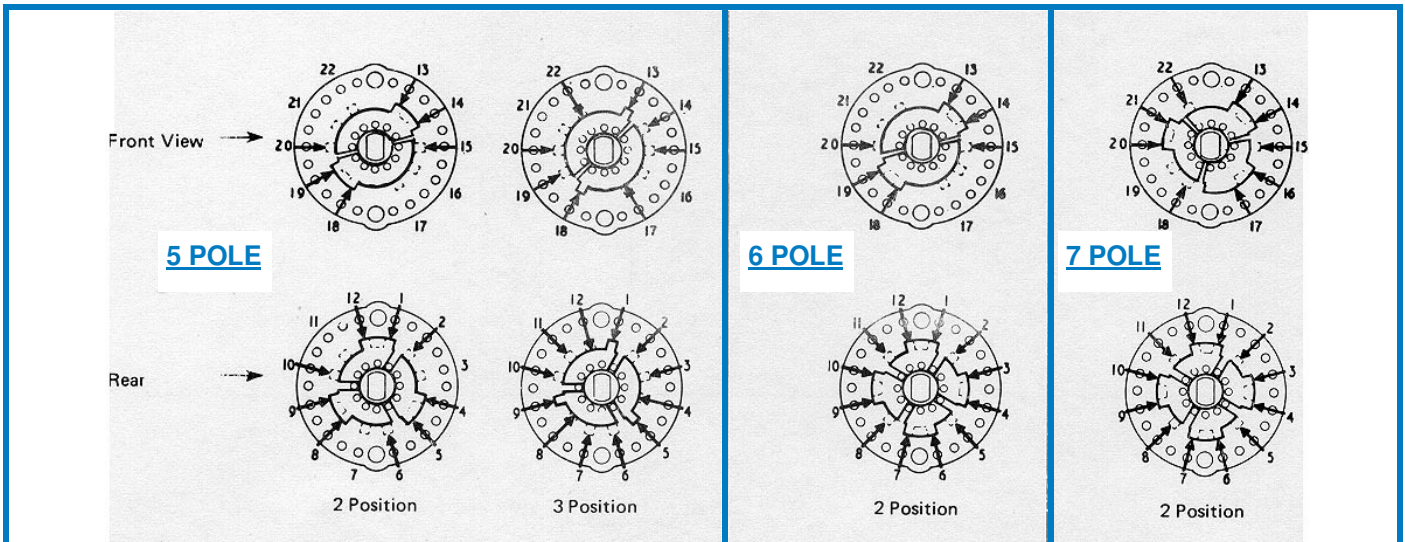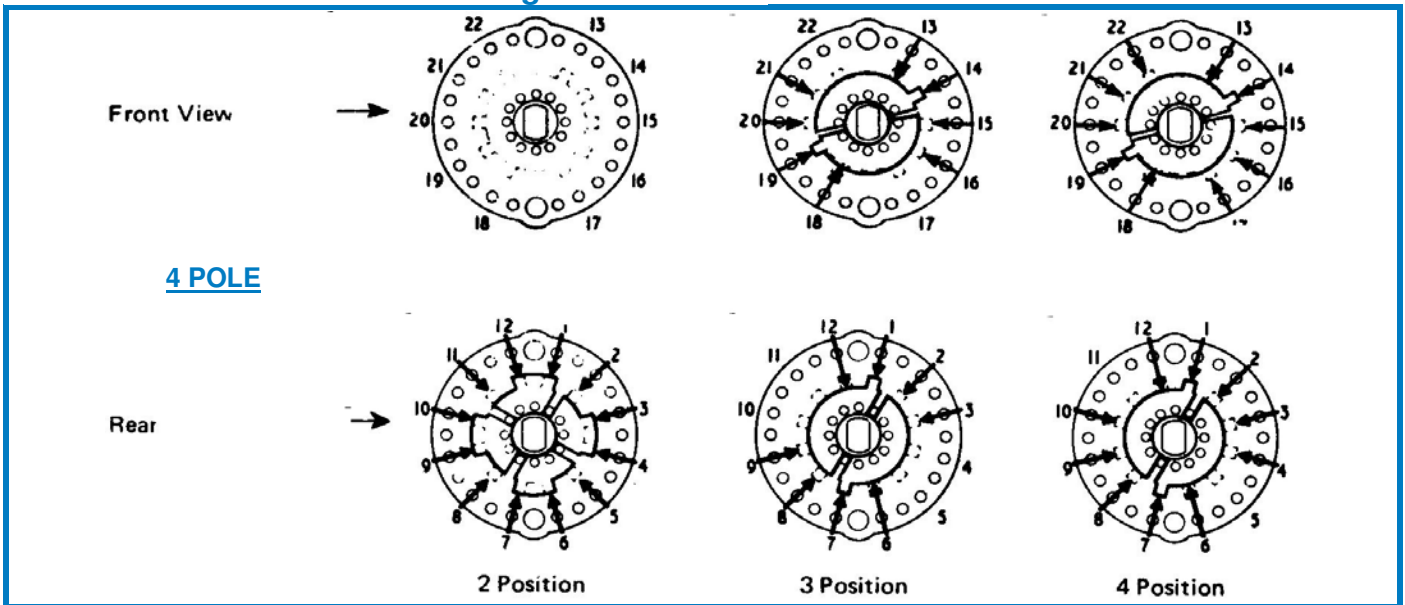

## 45° Indexing

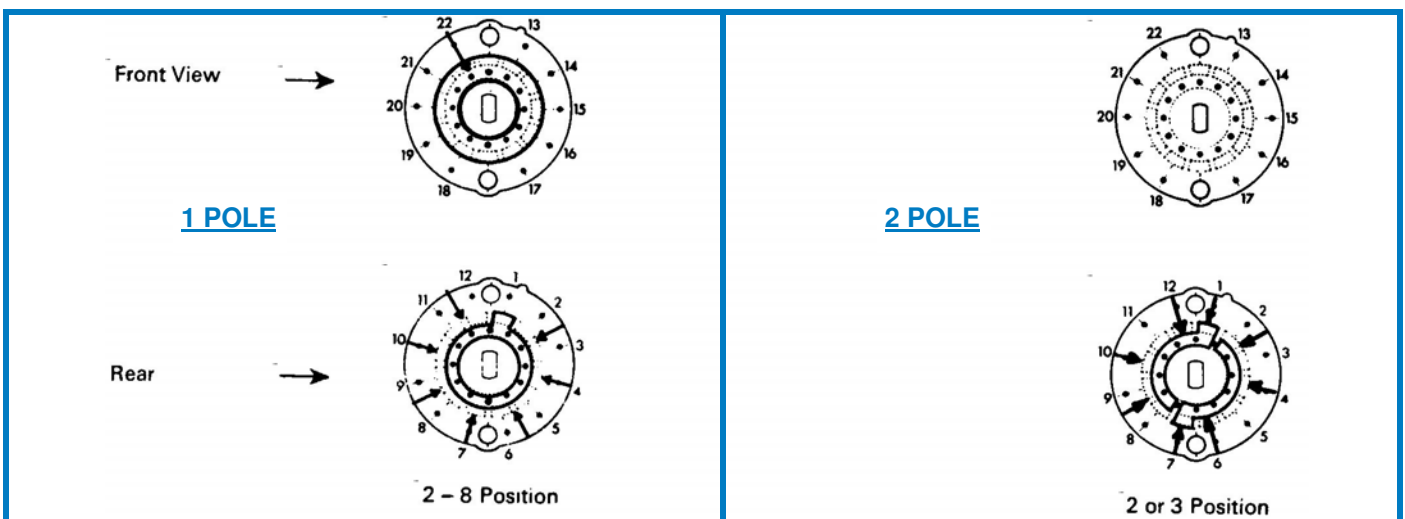

### Notes

Only available for 45° indexing with non-shorting rotor blades.  
Stops can only be fitted for 45° indexing at positions 3, 5 and 7.

Please Note: In line with continued development we reserve the right to amend specification without prior notice (Rev 01/12)

NSF Controls Ltd | Ingrow Bridge Works | Keighley | West Yorkshire | BD21 5EF | UK | Registered in England No. 3378269

T: +44 (0) 1535 661 144 | F: +44 (0) 1535 661 474 | E: [info@nsfcontrols.co.uk](mailto:info@nsfcontrols.co.uk) | [www.nsfcontrols.co.uk](http://www.nsfcontrols.co.uk)