

Push - Pull Solenoid


Linear - Size 4ECM



NSF
Innovative solutions
for a changing world

Medium Stroke, Conical Face

Part No: 282348-0XX

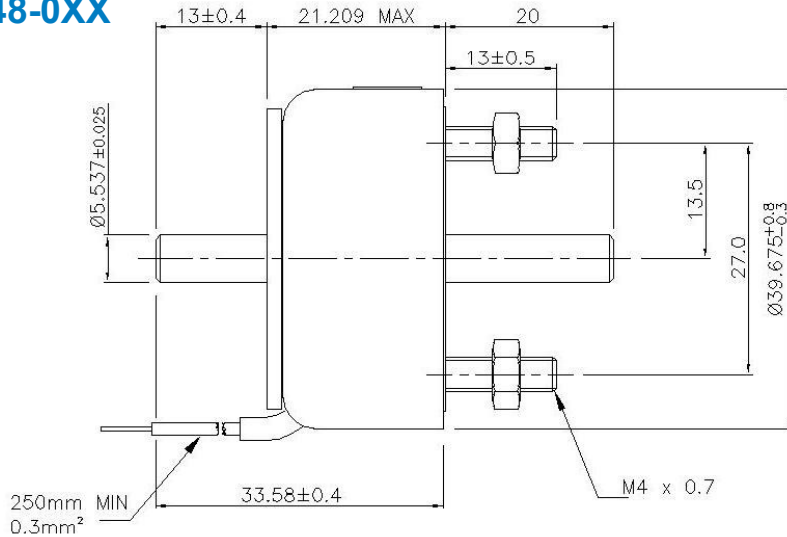

Solenoid shown in energised position

General Specifications

Dielectric Strength:

23-24 awg. 1000 VRMS
25-33 awg. 1200 VRMS

Coil Resistance:

+/- 5% tolerance

Holding Force:

71.2 N @ 105° C

Weight: 170 g

Recommended Heat Sink:

Maximum watts dissipated by the solenoid are based on an unrestricted flow of air at 20° C mounted on the equivalent of an aluminium plate 159x159x3.2mm min

Typical Performance Details for 4E Series:


Up to 105 N force at 0.5 mm stroke

Under 6 milliseconds response time for 1 mm stroke under no load conditions

Conical pole face allows increased stroke with minimal reduction in performance

Performance Specifications

Typical Starting Force @ 20°C

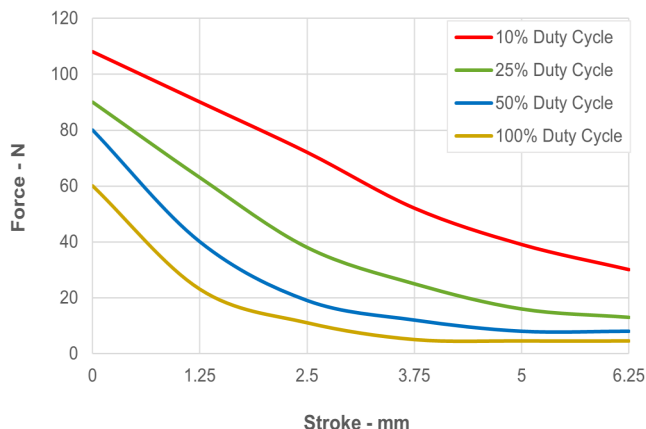

Coil Specifications

Maximum Duty Cycle	100%	50%	25%	10%		
Maximum ON Time (seconds) when pulsed continuously	∞	100	36	9		
Maximum ON Time (seconds) for single pulse	∞	162	44	10		
Watts (@ 20° C)	12.5	25	50	125		
Ampere Turns (@ 20° C)	714	1000	1425	2250		
Coil Data						
awg. (0XX)	Resistance (@ 20°C)	# Turns	Nominal DC Voltage			
23	1.59	266	4.3	6.0	8.5	13.4
24	2.20	301	5.2	7.3	10.4	16.4
25	3.54	384	6.6	9.2	13.1	21.0
26	5.67	486	8.3	11.7	16.6	26.0
27	8.76	600	10.4	14.6	21.0	33.0
28	13.80	748	13.2	18.5	26.0	42.0
29	22.60	975	16.6	23.0	33.0	52.0
30	34.80	1190	21.0	29.0	42.0	66.0
31	56.70	1520	27.0	37.0	53.0	84.0
32	88.30	1908	33.0	46.0	66.0	104.0
33	138.00	2360	42.0	59.0	83.0	132.0

NSF Controls reserves the right to amend specification without prior notice. (Rev 02/22 www.nsfcontrols.co.uk

NSF Controls Ltd | Ingrow Bridge Works | Keighley | West Yorkshire | BD21 5EF | UK | E:info@nsfcontrols.co.uk | T: +44(0)1535 661144